



PROUDLY CELEBRATING

TYING SERVICE TO QUALITY SINCE 1995

# stainless steel cable ties

- made from high quality 316 stainless steel, in a coated or uncoated finish
- provides a strong and durable method of cable bundling
- smooth surfaces and rounded edges assure cable protection and worker safety
- excellent UV and chemical resistance
- suitable for a wide range of indoor and outdoor applications, including underground where direct burial is needed
- working temperature -80°C to 538°C or -112°F to 1000°F
- minimum installation temperature of -60°C or -76°F
- UL Approved: E258930



communication

refineries

shipping

oil & petroleum


signage

automotive

cable installation

locomotive

self-locking head design speeds installation and locks into place at any length along tie body

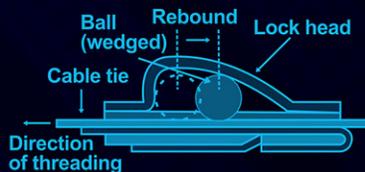

TEL 888-603-1233 EMAIL [sales@cabletieexpress.com](mailto:sales@cabletieexpress.com)

**cabletieexpress.com**

**Pegasus**  
SUPPLY GROUP

# technical specifications



## uncoated stainless steel cable ties

PART NUMBER	WIDTH		LENGTH		THICKNESS		TENSILE STRENGTH		MAX BUNDLE DIAMETER		STANDARD PACKAGE QUANTITY
	INCH	MM	INCH	MM	INCH	MM	LBS	N	INCH	MM	
6S6-150-100	0.18	4.6	6.0	150	0.01	0.25	200	890	1.8	46	100
8S6-150-100	0.18	4.6	7.9	200	0.01	0.25	200	890	2.4	61	100
10S6-150-100	0.18	4.6	10.2	260	0.01	0.25	200	890	3.1	81	100
14S6-150-100	0.18	4.6	14.3	360	0.01	0.25	200	890	4.0	112	100
20S6-150-100	0.18	4.6	20.5	520	0.01	0.25	200	890	6.0	163	100
27S6-150-100	0.18	4.6	26.8	680	0.01	0.25	200	890	8.0	214	100
33S6-150-100	0.18	4.6	33.0	840	0.01	0.25	200	890	10.0	254	100
8S6-300-100	0.31	7.9	7.9	200	0.01	0.25	325	1500	2.4	61	100
10S6-300-100	0.31	7.9	10.2	260	0.01	0.25	325	1500	3.1	81	100
14S6-300-100	0.31	7.9	14.3	360	0.01	0.25	325	1500	4.0	112	100
20S6-300-100	0.31	7.9	20.5	520	0.01	0.25	325	1500	6.0	163	100
27S6-300-100	0.31	7.9	26.8	680	0.01	0.25	325	1500	8.0	214	100
33S6-300-100	0.31	7.9	33.0	840	0.01	0.25	325	1500	10.0	265	100



## polyester coated stainless steel cable ties

PART NUMBER	WIDTH		LENGTH		THICKNESS		TENSILE STRENGTH		MAX BUNDLE DIAMETER		STANDARD PACKAGE QUANTITY
	INCH	MM	INCH	MM	INCH	MM	LBS	N	INCH	MM	
8SC6-150-100	0.18	4.6	7.9	200	0.01	0.25	200	890	2.4	61	100
10S6-150-100	0.18	4.6	10.2	260	0.01	0.25	200	890	3.1	81	100
14SC6-150-100	0.18	4.6	14.3	360	0.01	0.25	200	890	4.0	112	100
20SC6-150-100	0.18	4.6	20.5	520	0.01	0.25	200	890	6.0	163	100
27SC6-150-100	0.18	4.6	26.8	680	0.01	0.25	200	890	8.0	214	100
8SC6-300-100	0.31	7.9	7.9	200	0.01	0.25	325	1500	2.4	61	100
14SC6-300-100	0.31	7.9	14.3	360	0.01	0.25	325	1500	4.0	112	100
20SC6-300-100	0.31	7.9	20.5	520	0.01	0.25	325	1500	6.0	163	100
27SC6-300-100	0.31	7.9	26.8	680	0.01	0.25	325	1500	8.0	214	100